

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	19.4 cd per klm.
(Luminaire orientation as tested.)	-4.5 degrees vertical
	-19.5 degrees horizontal

Beam Spread	At 10% of Imax	100.7V x 66.7H
	At 50% of Imax	10.3V x 31.4H
	At 90% of Imax	3.4V x 7.7H

Beam Flux	Total	8.5 lumens per klm.
	To 10% of Imax	7.3 lumens per klm.
	To 50% of Imax	2.1 lumens per klm.
	To 90% of Imax	0.1 lumens per klm.

Upward LOR	0.0 %
Downward LOR	0.8 %


Luminaire Efficiency (Light Output Ratio)	0.8 %
---	-------

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 06 October 2022

γ Range: 0 - 90DEG
γ Interval: 2.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 6.265m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

NAME: 96GRFLED070/T1	TYPE:	WEIGHT: 1
SPEC.:	DIM.: F120 x 110	SERIAL No.: 0
MFR.: Elmark Industries JSC	SUR.: round	Shielding Angle:

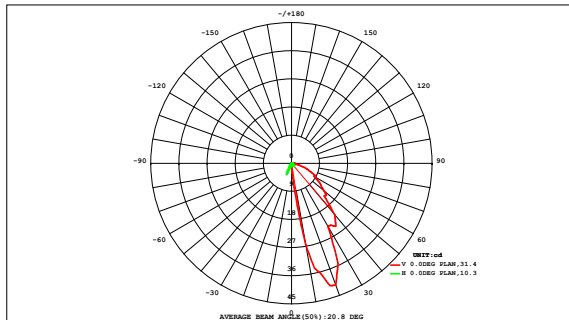

DATA OF LAMP		PHOTOMETRIC DATA	
MODEL	96GRFLED070/T1	Imax (cd)	43.74
NOMINAL POWER (W)	7	AVAILABILITY (%)	0.7
RATED VOLTAGE (V)	230	Avai. FLUX (lm)	16.47
NOMINAL FLUX (lm)	322	LOR (%)	0.8
LAMPS INSIDE	7	TOTAL FLUX (lm)	19.09
TEST VOLTAGE (V)	230	θ @50% (H,V)	31,10DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00
90	0.00	0.01	0.01	0.01	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.00
80	0.00	0.01	0.02	0.03	0.05	0.05	0.05	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.25	0.00
70	0.00	0.01	0.03	0.07	0.09	0.09	0.10	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.50	0.08
60	0.00	0.01	0.04	0.09	0.13	0.15	0.15	0.15	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.81	0.66
50	0.00	0.01	0.06	0.11	0.18	0.20	0.26	0.21	0.15	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.20	1.11
40	0.00	0.02	0.07	0.13	0.20	0.29	0.36	0.33	0.27	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.71	1.64
30	0.00	0.02	0.08	0.16	0.25	0.41	0.51	0.54	0.26	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.24	2.18
20	0.00	0.02	0.09	0.18	0.31	0.52	0.80	0.85	0.23	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.02	2.95
10	0.00	0.02	0.09	0.18	0.32	0.57	0.80	1.05	0.22	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.26	3.20
0	0.00	0.02	0.08	0.14	0.25	0.47	0.49	0.61	0.12	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.20	2.14
-10	0.00	0.02	0.07	0.13	0.19	0.29	0.27	0.32	0.08	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.37	1.31
-20	0.00	0.01	0.06	0.11	0.16	0.17	0.17	0.17	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.94	0.83
-30	0.00	0.01	0.04	0.09	0.12	0.11	0.11	0.12	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.69	0.34
-40	0.00	0.01	0.03	0.06	0.09	0.07	0.06	0.07	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	0.04
-50	0.00	0.01	0.01	0.03	0.05	0.04	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.00
-60	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.00
-70	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
-80	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-90	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
HORIZONTAL (DEG)																				
Φ t	0.04	0.23	0.80	1.54	2.44	3.48	4.19	4.58	1.66	0.13	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	19	---
Φ a	0.00	0.01	0.56	1.31	2.19	3.15	3.85	4.21	1.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	16

one-half-peak spread: U:4.8,D:5.6 , L:5.6,R:10.9


NEMA Beam Type: Type 4 x 6 (H x V)

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:
Test Date:06 October 2022

γ Range: 0 - 90DEG
γ Interval: 2.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:6.265m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: 96GRFLED070/T1	TYPE:	WEIGHT: 1
SPEC.:	DIM.: F120 x 110	SERIAL No.: 0
MFR.: Elmark Industries JSC	SUR.: round	Shielding Angle:

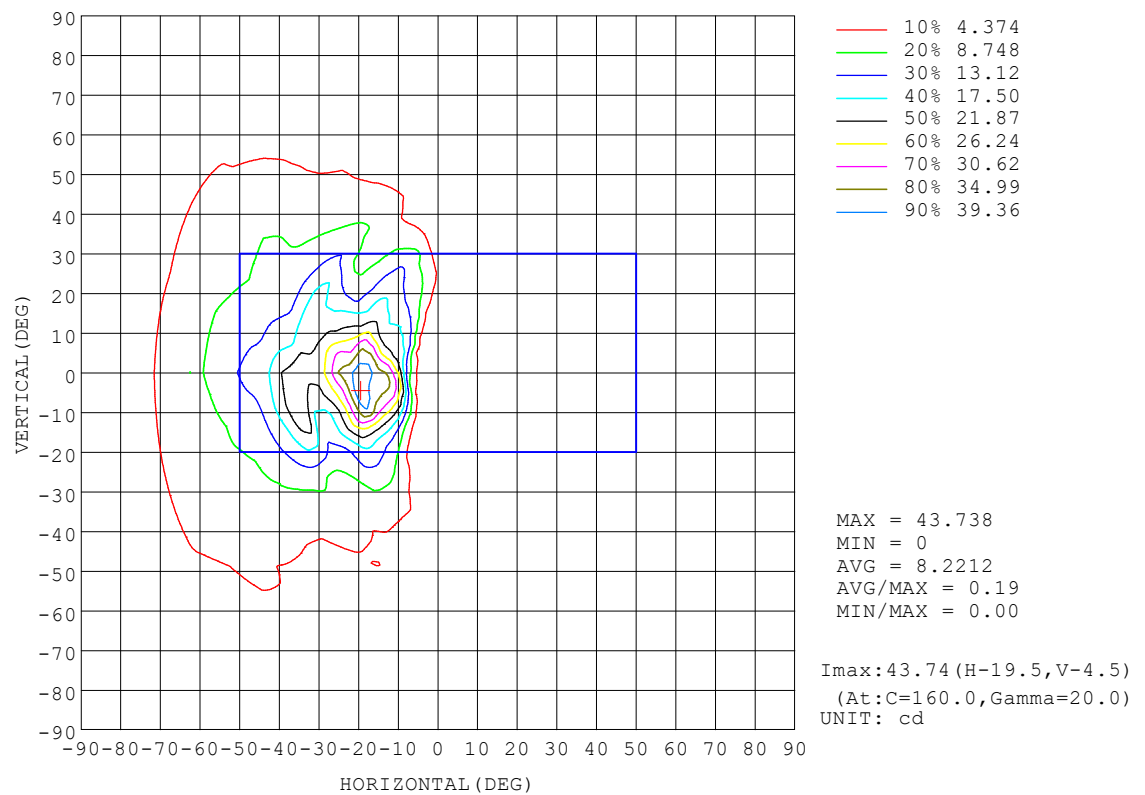


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 06 October 2022

γ Range: 0 - 90DEG
γ Interval: 2.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 6.265m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


NAME: 96GRFLED070/T1	TYPE:	WEIGHT: 1
SPEC.:	DIM.: F120 x 110	SERIAL No.: 0
MFR.: Elmark Industries JSC	SUR.: round	Shielding Angle:

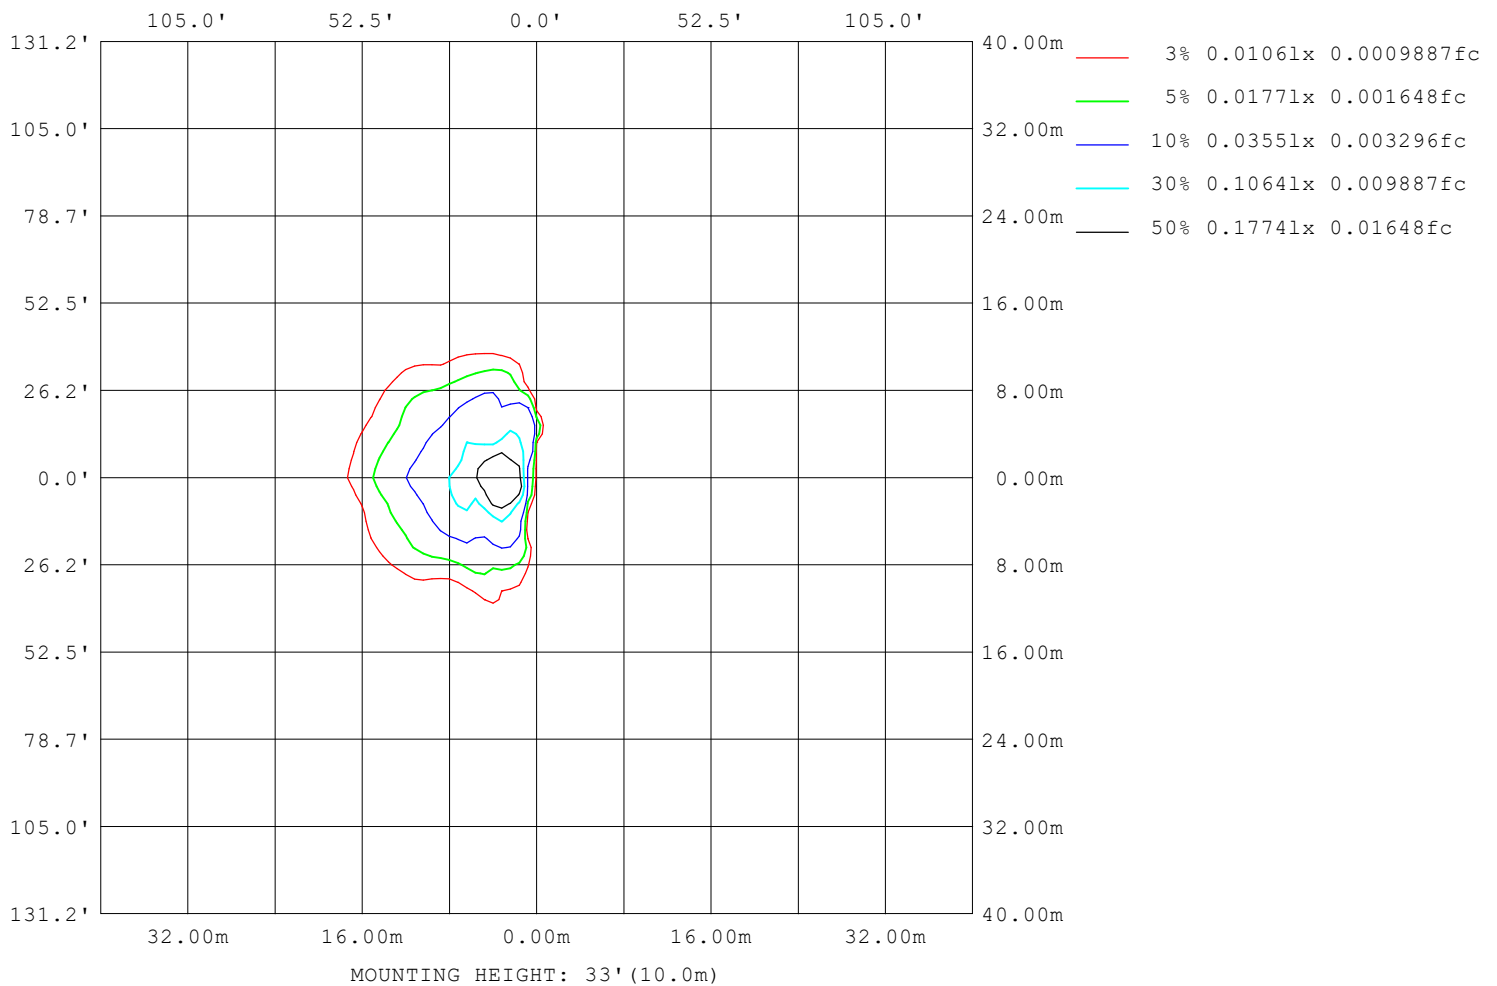

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators:
Test Date: 06 October 2022

γ Range: 0 - 90DEG
γ Interval: 2.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.456
Humidity: 65.0%
Test Distance: 6.265m [K=1.0000]
Remarks:

Planar Illuminance Curve

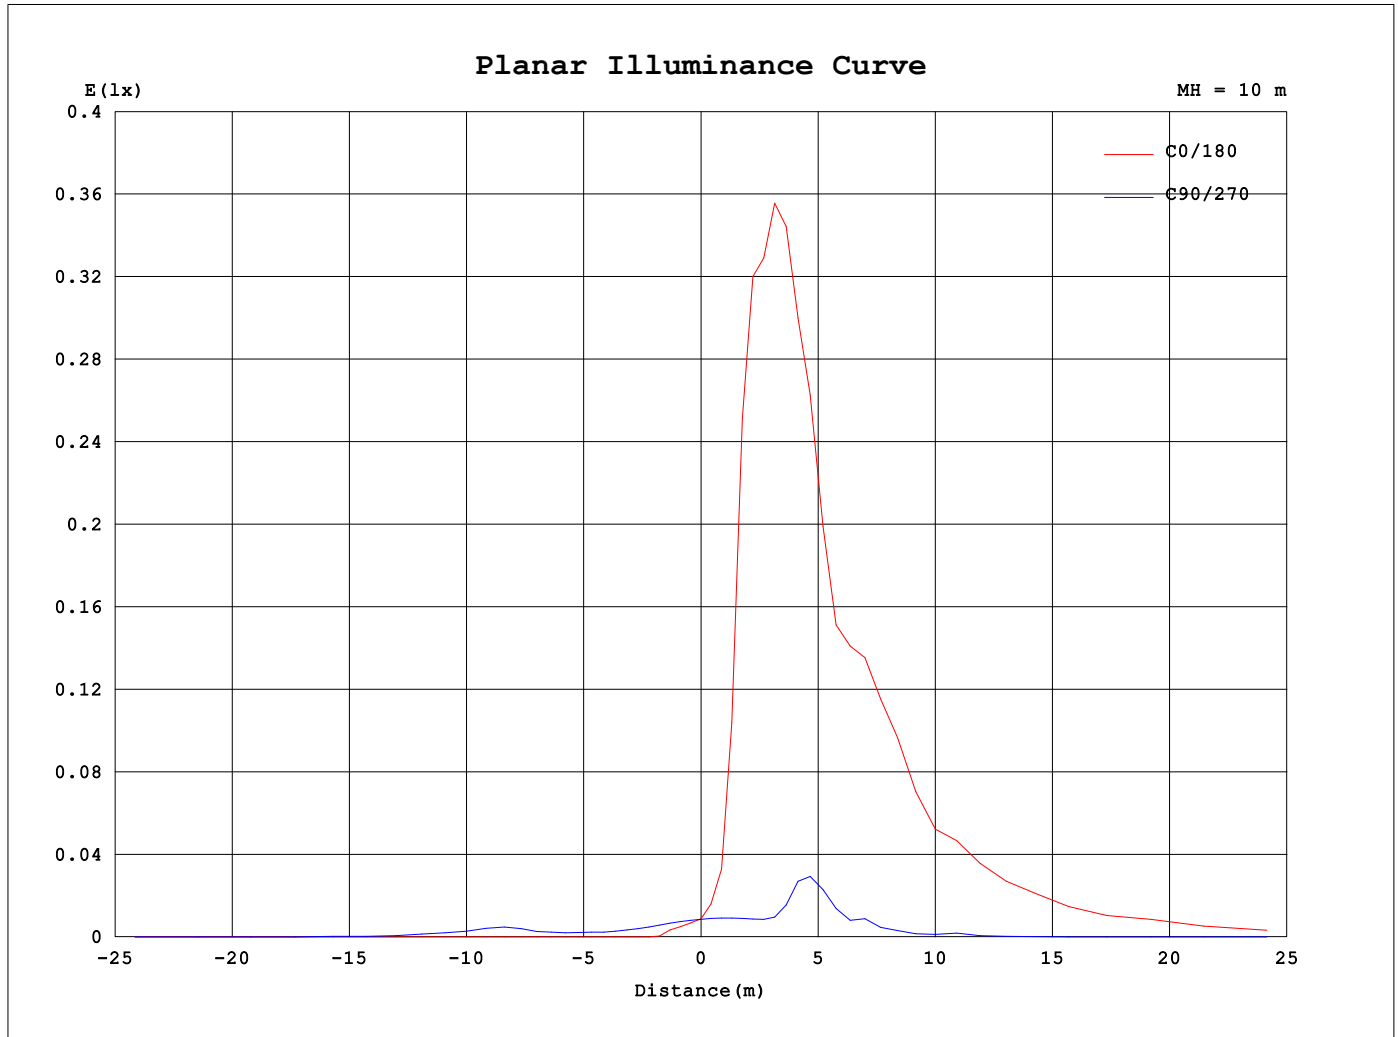


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 06 October 2022

γ Range: 0 - 90DEG
 γ Interval: 2.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 6.265m [K=1.0000]
 Remarks:

AAI Figure

NAME: 96GRFLED070/T1	TYPE:	WEIGHT: 1
SPEC.:	DIM.: F120 x 110	SERIAL No.: 0
MFR.: Elmark Industries JSC	SUR.: round	Shielding Angle:

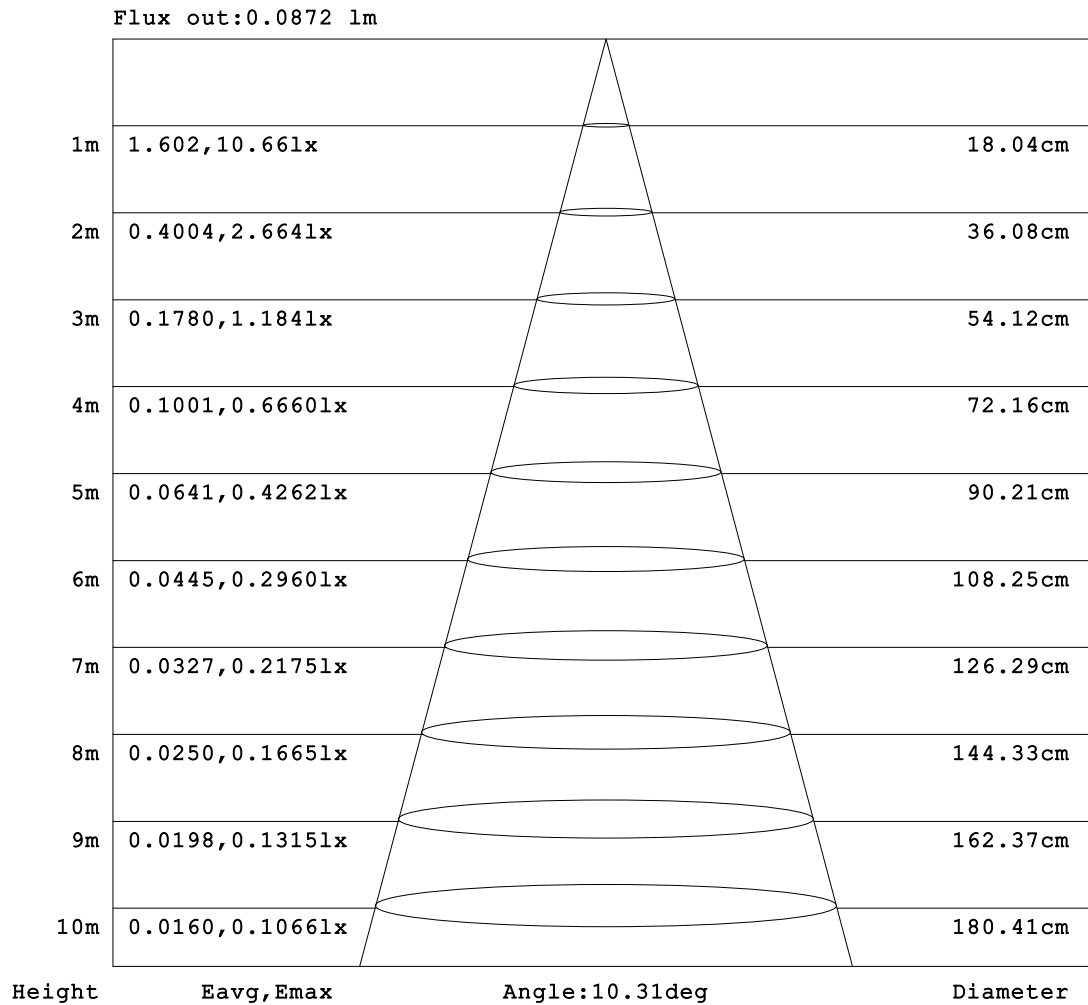

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 06 October 2022

γ Range: 0 - 90DEG
 γ Interval: 2.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.456
 Humidity: 65.0%
 Test Distance: 6.265m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 96GRFLED070/T1	TYPE:	WEIGHT: 1
SPEC.:	DIM.: F120 x 110	SERIAL No.: 0
MFR.: Elmark Industries JSC	SUR.: round	Shielding Angle:

Table--1

UNIT: cd

H(DEC) V(DEC)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.85	0.82	0.79	0.72	0.64	0.59	0.54	0.49	0.45	0.36	0.27	0.21	0.15	0.11	0.06	0.03	0.00	0.00	0.00
-85	0.85	0.80	0.75	0.65	0.57	0.51	0.45	0.41	0.37	0.31	0.24	0.20	0.17	0.12	0.06	0.03	0.00	0.00	0.00
-80	0.85	0.77	0.70	0.60	0.54	0.50	0.45	0.44	0.43	0.36	0.28	0.28	0.25	0.18	0.09	0.05	0.02	0.01	0.00
-75	0.85	0.75	0.65	0.60	0.55	0.54	0.52	0.56	0.60	0.64	0.59	0.55	0.57	0.42	0.20	0.12	0.05	0.02	0.00
-70	0.85	0.73	0.65	0.61	0.60	0.67	0.71	0.96	1.22	1.27	1.10	1.03	1.06	0.90	0.62	0.39	0.13	0.05	0.00
-65	0.85	0.70	0.65	0.65	0.75	0.96	1.26	1.58	2.00	2.21	1.85	1.68	1.76	1.52	1.04	0.77	0.53	0.28	0.00
-60	0.85	0.68	0.65	0.68	0.97	1.44	1.88	2.37	2.87	3.08	2.85	2.45	2.04	1.73	1.53	1.39	1.19	0.72	0.10
-55	0.85	0.68	0.67	0.84	1.34	2.03	2.72	3.16	3.64	4.24	3.99	2.73	2.42	1.97	2.19	2.51	2.57	1.71	0.24
-50	0.85	0.68	0.70	0.99	1.73	2.73	3.62	4.01	4.54	5.51	4.29	3.54	2.94	2.88	3.35	3.87	3.09	1.86	0.57
-45	0.85	0.68	0.72	1.21	2.16	3.48	4.44	4.80	5.83	5.49	5.41	4.58	3.62	4.00	4.42	3.73	3.32	2.49	0.79
-40	0.85	0.68	0.75	1.48	2.59	4.15	5.06	5.69	6.49	6.43	6.34	5.51	4.98	5.39	4.95	4.38	3.95	2.75	1.10
-35	0.85	0.68	0.82	1.72	3.16	4.70	5.49	6.42	6.97	7.41	7.20	6.38	6.50	6.39	5.08	5.54	5.08	3.48	0.49
-30	0.85	0.68	0.88	1.95	3.70	5.06	5.92	6.71	7.73	7.94	8.33	8.44	8.64	6.46	6.86	8.44	6.39	2.30	0.33
-25	0.85	0.68	0.94	2.15	4.06	5.40	6.38	7.14	8.30	8.60	9.93	11.7	11.5	8.59	10.8	11.6	7.86	1.67	0.31
-20	0.85	0.68	0.98	2.31	4.36	5.67	6.61	7.56	8.64	9.54	12.3	15.5	15.8	11.6	15.4	14.6	8.72	1.59	0.35
-15	0.85	0.69	1.01	2.45	4.63	6.03	6.89	7.96	9.64	10.9	15.2	20.9	16.5	17.0	23.9	20.4	12.0	1.75	0.46
-10	0.85	0.69	1.04	2.55	4.87	6.42	7.38	9.05	10.9	12.6	18.2	24.3	17.2	21.2	34.5	31.1	20.1	3.48	0.61
-5	0.85	0.69	1.05	2.62	5.06	6.79	7.86	10.2	12.2	14.0	20.3	25.2	21.1	27.7	41.8	36.3	27.4	3.31	0.76
0	0.85	0.69	1.05	2.65	5.18	7.11	8.36	11.2	13.4	14.8	21.5	24.7	23.3	35.3	41.5	36.5	26.3	3.34	0.89
5	0.85	0.69	1.05	2.62	4.98	6.92	8.18	10.5	12.2	13.8	17.8	21.5	22.7	30.8	35.1	28.5	20.1	3.78	0.94
10	0.85	0.69	1.04	2.55	4.71	6.64	7.96	9.67	11.0	12.5	14.7	18.8	21.2	22.6	24.8	21.9	18.1	6.97	0.94
15	0.85	0.69	1.02	2.44	4.40	6.26	7.64	8.97	9.93	11.3	12.6	15.7	19.6	18.1	17.5	19.5	15.8	9.40	0.96
20	0.85	0.69	1.00	2.30	4.06	5.78	7.21	8.34	9.04	10.0	11.2	13.3	19.5	14.3	12.0	15.6	14.8	9.74	1.88
25	0.85	0.70	0.96	2.12	3.72	5.30	6.72	7.53	8.17	9.45	9.98	11.1	14.5	14.1	8.65	11.1	13.7	9.66	3.96
30	0.85	0.70	0.91	1.91	3.37	4.88	6.09	6.79	7.78	8.92	9.66	9.23	11.0	12.8	8.60	7.55	9.82	9.22	2.14
35	0.85	0.70	0.85	1.68	3.00	4.40	5.54	6.36	7.18	8.42	8.53	7.75	8.52	9.58	10.0	6.65	5.90	5.46	1.62
40	0.85	0.70	0.78	1.46	2.59	3.91	5.30	5.70	6.33	7.31	7.68	6.81	6.70	7.07	7.50	7.25	4.83	2.72	0.72
45	0.85	0.70	0.75	1.24	2.20	3.37	4.56	5.11	5.65	5.97	6.73	6.00	5.24	5.42	5.46	5.38	4.52	2.84	0.36
50	0.85	0.70	0.74	1.05	1.82	2.76	3.84	4.54	4.83	5.27	5.16	4.85	4.41	4.49	4.15	3.72	3.04	1.87	0.27
55	0.85	0.70	0.72	0.91	1.45	2.19	3.03	4.00	4.03	4.15	3.99	3.68	3.59	3.40	3.50	3.04	2.00	1.10	0.09
60	0.85	0.70	0.70	0.76	1.09	1.67	2.19	2.92	3.32	3.20	3.02	2.51	2.61	2.73	2.68	2.09	0.79	0.26	0.02
65	0.85	0.72	0.70	0.72	0.85	1.16	1.57	1.91	2.30	2.64	2.37	2.02	1.65	1.57	1.94	1.45	0.39	0.11	0.01
70	0.85	0.75	0.70	0.69	0.71	0.83	1.03	1.25	1.38	1.54	1.62	1.45	1.09	0.93	0.86	0.55	0.13	0.05	0.01
75	0.85	0.77	0.70	0.69	0.68	0.67	0.69	0.78	0.84	0.88	0.92	0.77	0.53	0.45	0.41	0.25	0.04	0.02	0.01
80	0.85	0.80	0.75	0.69	0.69	0.63	0.58	0.56	0.55	0.52	0.50	0.40	0.27	0.22	0.17	0.10	0.01	0.00	0.00
85	0.85	0.83	0.80	0.77	0.74	0.65	0.58	0.53	0.48	0.44	0.40	0.32	0.24	0.17	0.11	0.05	0.00	0.00	0.00
90	0.85	0.85	0.85	0.85	0.85	0.76	0.68	0.63	0.58	0.53	0.47	0.39	0.31	0.21	0.11	0.06	0.00	0.00	0.00

C Range: 0 - 360DEG

C Interval: 10.0DEG

Test Speed: HIGH

Temperature:25.3°C

Operators:

Test Date:06 October 2022

γ Range: 0 - 90DEG

γ Interval: 2.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:6.265m [K=1.0000]

Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: 96GRFLED070/T1	TYPE:	WEIGHT: 1
SPEC.:	DIM.: F120 x 110	SERIAL No.: 0
MFR.: Elmark Industries JSC	SUR.: round	Shielding Angle:

Table--2

UNIT: cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.11	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.24	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.30	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.33	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	0.17	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	0.13	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-25	0.15	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	0.19	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-15	0.24	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-10	0.34	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-5	0.43	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
0	0.51	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5	0.52	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	0.43	0.17	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
15	0.39	0.17	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
20	0.41	0.15	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
25	0.46	0.15	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
30	0.44	0.13	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
35	0.42	0.11	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	0.27	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	0.16	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

C Range: 0 - 360DEG

C Interval: 10.0DEG

Test Speed: HIGH

Temperature:25.3°C

Operators:

Test Date:06 October 2022

γ Range: 0 - 90DEG

γ Interval: 2.5DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.456

Humidity:65.0%

Test Distance:6.265m [K=1.0000]

Remarks: